


POWER SECTION

ROTOR SPECIFICATIONS		
	Inch	mm
Overall Length	202.5	5144
Contour Length	195.5	4966
Eccentricity	0.355	9.02
Major Diameter	4.220	107.19
Head Diameter	4.000	101.60
Weight	500 (lbs) 226.8 (kg)	
Material	17-4SS	
Thread Form*	2 7/8 API REG	

STATOR SPECIFICATIONS		
	Inch	mm
Overall Length	210.0	5334
Rubber Cut Back	7.5	191
Tube O.D.	6.75	171.5
Tube I.D.	5.50	139.7
Alternate Length	214.63	5452
Weight	822 (lbs) 373 (kg)	
Number of Stages	7.00	
Rubber Type	NBR-1A, HSN-38, NBR-HR	
Tube Material	4142 Seamless Tubing	


FIT INFORMATION		
NBR-1A & HSN-38	Minor Diameter	
Stator Size	Inch	mm
Standard	3.499	88.87
Oversize	3.521	89.43
Double Oversize	3.554	90.27
Nominal Fit at 75 F (25 C)		
Standard	0.011	0.28
Oversize	-0.011	-0.28
Double Oversize	-0.044	-1.12

* Alternate or custom thread forms are available

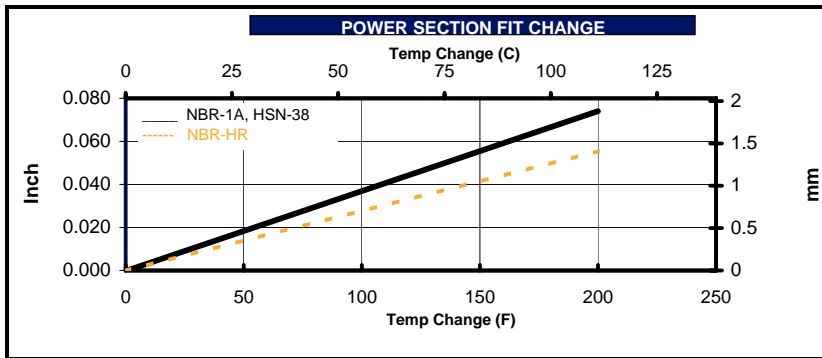

FIT INFORMATION		
NBR-HR	Minor Diameter	
Stator Size	Inch	mm
Undersize	3.501	88.93
Oversize	3.526	89.56
Nominal Fit at 75 F (25 C)		
Undersize	0.009	0.23
Oversize	-0.016	-0.41

PERFORMANCE SPECIFICATIONS			PERFORMANCE DETAILS		
			NBR-1A AND HSN-38	NBR-HR	
Torque Slope	5.770 ft-lb/psi 1.135 Nm/kPa		Max Diff Press psi (kPa)	1050 (7240)	1580 (10860)
Flow Range	300 to 600 GPM 1140 to 2270 Litre/min		Max Torque ft-lb (Nm)	6060 (8220)	9090 (12330)
Rotation	0.497 Rev/Gal 0.131 Rev/Litre		Stall Diff Press psi (kPa)	1580 (10860)	2360 (16290)
Speed Range	149 to 300 RPM		Stall Torque ft-lb (Nm)	9090 (12330)	13630 (18490)
Off Bottom Press	167 psi 1150 kPa		Max Recommended HP(kW)	289 (216)	482 (360)

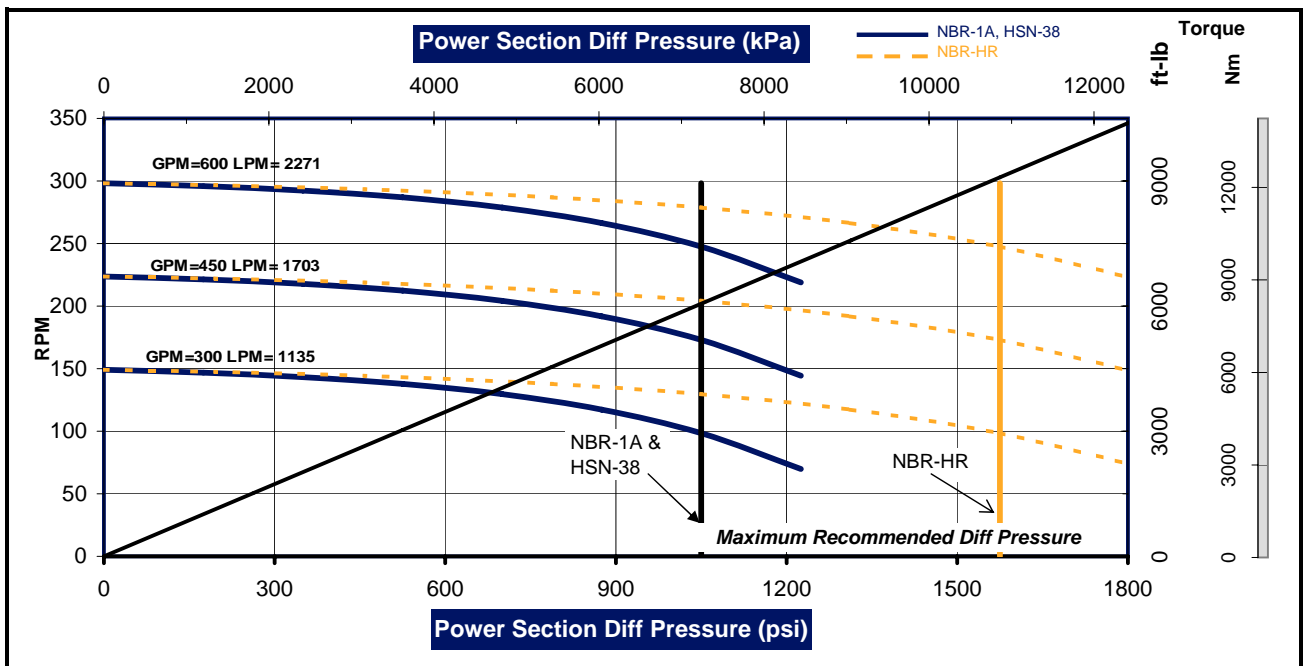

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance Curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice. Copyright 2008 Dyna-Drill® Technologies, Inc. All rights reserved.