


POWER SECTION

ROTOR SPECIFICATIONS		
	Inch	mm
Overall Length	129.0	3277
Contour Length	124.0	3150
Eccentricity	0.179	4.55
Major Diameter	2.159	54.84
Head Diameter	1.750	44.50
Weight	93 (lbs)	42.2 (kg)
Material	17-4SS	
Thread Form*	1.375 - 6 STUB	ACME

STATOR SPECIFICATIONS		
	Inch	mm
Overall Length	135.0	3429
Rubber Cut Back	6.0	152
Tube O.D.	3.75	95.3
Tube I.D.	3.00	76.2
Weight	179 (lbs)	81 (kg)
Number of Stages	3.5	
Rubber Type	NBR-1A, NBR-HR	
Tube Material	4142 Seamless Tubing	


FIT INFORMATION		
NBR-1A	Minor Diameter	
Stator Size	Inch	mm
Standard	1.780	45.21
Oversize	1.813	46.05
Double Oversize		
Nominal Fit at 75 F (25 C)		
Standard	0.021	0.53
Oversize	-0.012	-0.31
Double Oversize		

* Alternate or custom thread forms are available

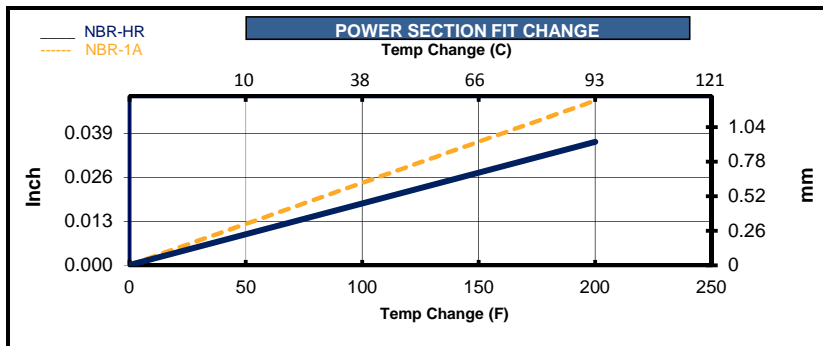

FIT INFORMATION		
NBR-HR	Minor Diameter	
Stator Size	Inch	mm
Undersize		
Standard	1.780	45.21
Oversize		
Double Oversize		
Nominal Fit at 75 F (25 C)		
Undersize		
Standard	0.021	0.53
Oversize		
Double Oversize		

PERFORMANCE SPECIFICATIONS			PERFORMANCE DETAILS		
Torque Slope	1.820 ft-lb/psi	0.358 Nm/kPa	Max Diff Press psi (kPa)	NBR-1A 530 (3620)	NBR-HR 790 (5430)
Flow Range	80 to 160 GPM	300 to 610 Litre/min	Max Torque ft-lb (Nm)	960 (1300)	1430 (1940)
Rotation	1.550 Rev/Gal	0.410 Rev/Litre	Stall Diff Press psi (kPa)	790 (5430)	1180 (8140)
Speed Range	124 to 250 RPM		Stall Torque ft-lb (Nm)	1430 (1940)	2150 (2920)
Off Bottom Press	69 psi	480 kPa	Max Recommended HP(kW)	45 (34)	63 (47)

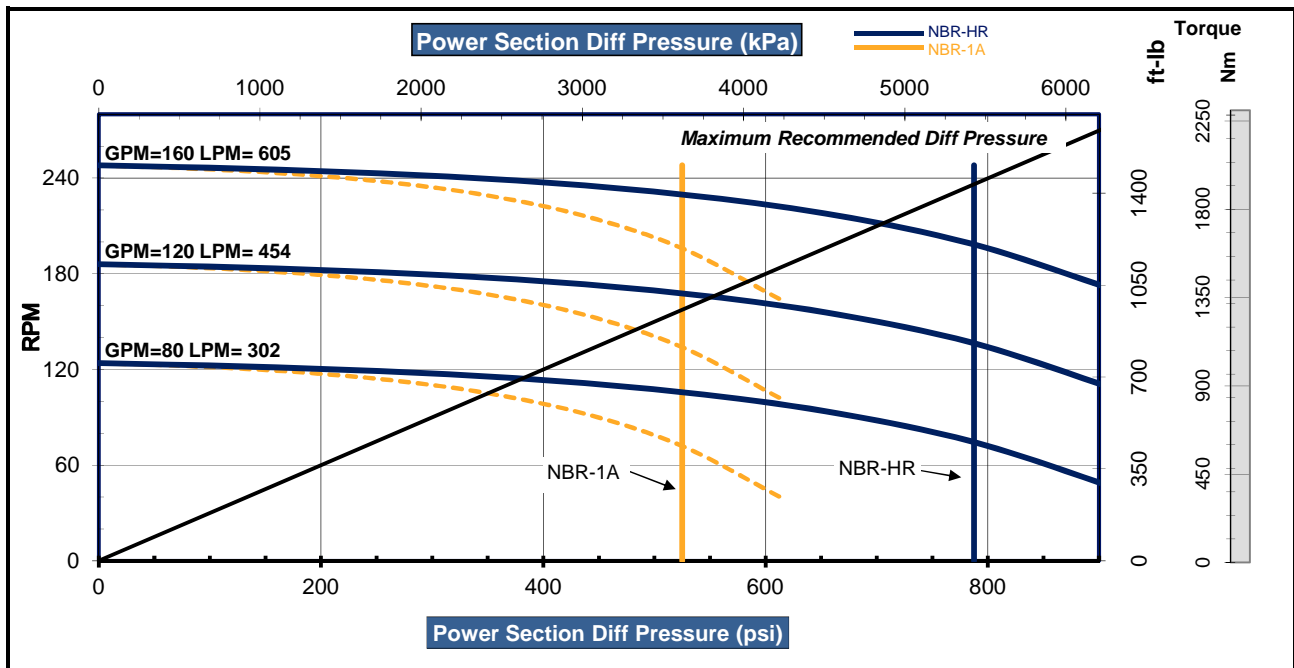

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance Curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice. Copyright 2014 Dyna-Drill®. All rights reserved.